



はずる TM H U Z Z L E [®]

Huzzle Cast Dial

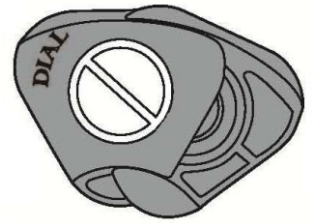


Assembled




Disassembled

First, confirm the thickness of the silver piece inside.
The outside piece with the DIAL engraved is thinner so make sure
the thinner piece inside is also on the side of the piece with the DIAL.

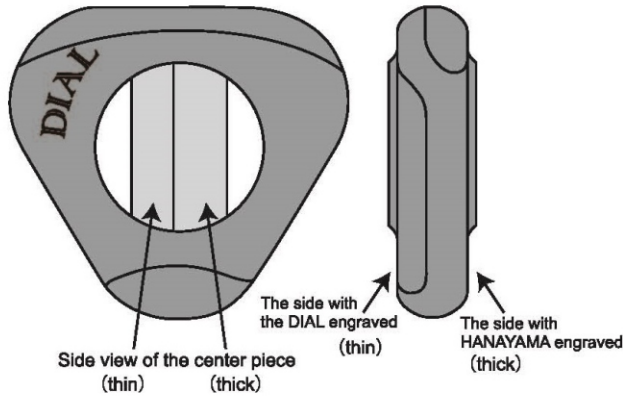


<Explanation of the inside piece>

* For instruction purposes, the star mark ★ will be as marked.

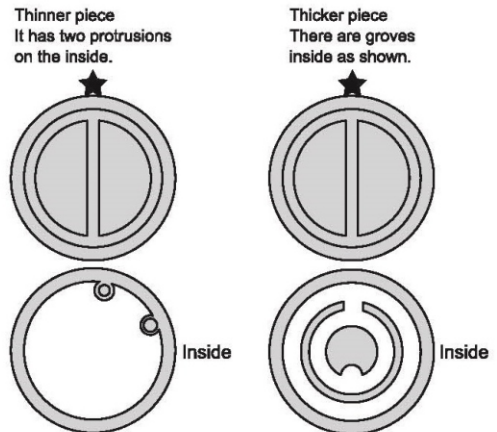


Following the diagram below, rotate the inside piece, making sure the protrusions and grooves fit together, and shift
the outside piece. Putting too much strength to the outside piece will make rotation of the inside piece difficult.


① Position the front and back surface of the inside piece together.

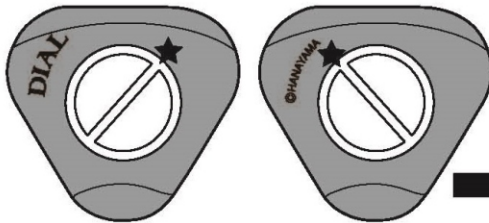


② The outside piece will shift. If it will not shift, that means
position of the inside piece is wrong, so rotate the inside
piece 180 degrees to search for the position where the piece shifts.

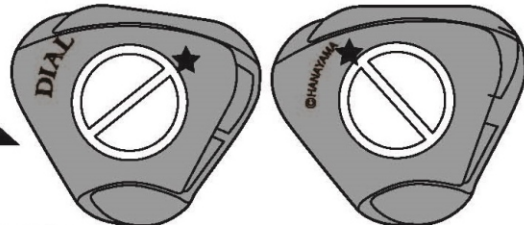


③ Position the inside piece as shown in the diagram below, and shift
the outside piece. Align the position from the piece with the HANAYAMA engraving.

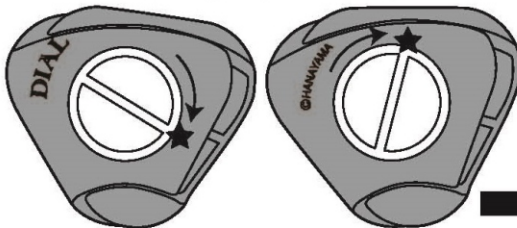

④ Position the inside piece to the position as shown in the diagram
below and shift the outside piece.

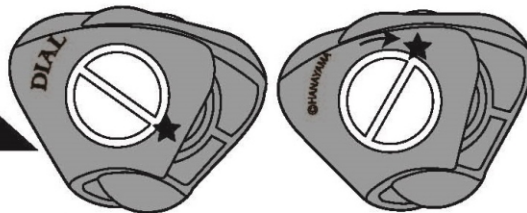


⑤ Position the inside piece as shown in the diagram below
and shift the outside piece.

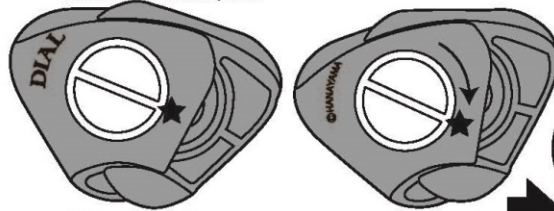

* Do not move this.

⑥ When the piece is in this state, the inside piece can be twisted off.

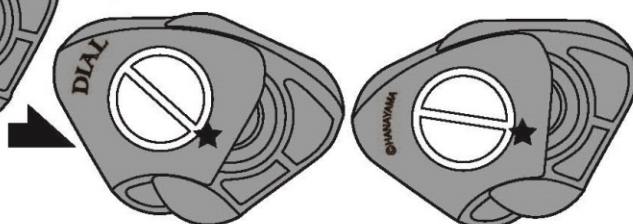

* Do not move this.

* This solution is one example only.

Designer: Vesa Timonen (FIN)

© 2016, 2018 Hanayama Co., Ltd.
All Rights Reserved



Exclusive European distribution
by Eureka bvba - 2800 Mechelen, Belgium